

Illuminated Cup Holders

2012-2015 Honda Civic (all trims)

Thanks for purchasing this Cup Holder Illumination Install Kit! If you have any questions or feedback please email us direct at info@AccentGlowLED.com

Color instructions and Installation video available at AccentGlowLED.com/instructions

Read these instructions completely before beginning installation

AccentGlowLED,LLC. does not assume responsibility and disclaims liability for damage, loss, or expense arising from improper use, operation, or installation of this product.

You may need the following tools:


- Plastic panel popper tool (Harbor Freight.com #67021)
- Small Flathead Screwdriver
- 3/16" Drill Bit (or larger)
- Electrical Tape
- Razor Blade
- Wire Strippers (product similar to the Irwin 2078300 is used)
- Soldering Iron or another wire attachment technique.

Disassembly:

-Prior to beginning; engage the parking brake and make sure vehicle is powered off. We will be removing the panel highlighted in (A). Use a small flat head screw driver to carefully pop up the shift lock cover (B), then push the flat head screw driver down into the hole and shift to Neutral. Using a plastic pry tool, wedge into left side of center shifter trim and carefully pop up (C). Move the pry tool to the right and pop up the right side of the shifter trim (D).




-Pop up the remainder of the shifter trim, pull backwards a bit to get under front dash lip, and fully remove shifter trim piece (E) (depending on trim you may have plugs to unplug). Next we need to remove the piece highlighted in (F) which will all pop up. Use two fingers or a plastic pry tool to grab the center console piece on the left side and lift up (G). Now do the same on the right side front (H). The rest of the console will pop and lift up, work your way towards the back of the panel. Lift up and place entire center console on a work bench.

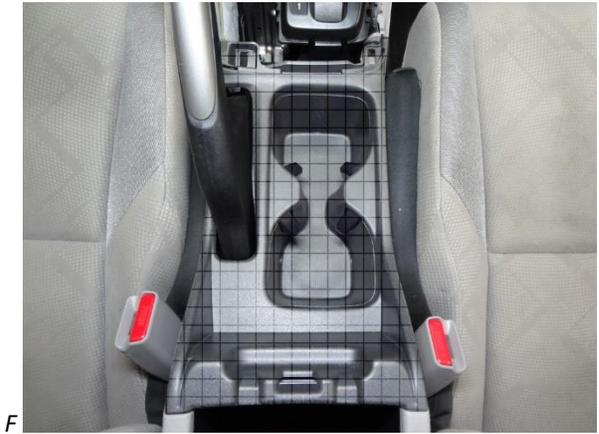

- Thoroughly clean inside each cup holder with an alcohol pad or Windex (this step is important for quality of adherent). Drill a 3/16" hole from the top of the center console slightly off center in each cup holder (I). Carefully run your wires through the holes starting at the top (J) and remove the red covering from the double-sided tape on the back of each cup holder disc (K). Center each disc and then press down firmly to secure each disc (do not remove disc once firmly pushed down) (L).



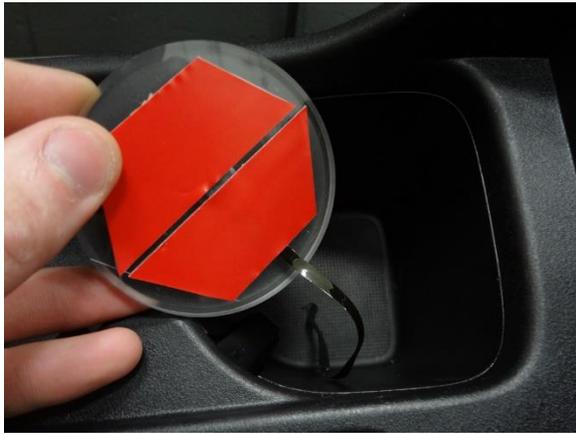

K



L

Installation:

-Place center console in car on the passenger seat. The wiring we need is in the black 2-pin bulb plug on the left of the shifter (M). Unplug by turning counter-clockwise and remove (N). Begin by taking the RED (+) LED wires and twisting them together (O). Do the same with the BLACK (-) LED wires.



M






N



O

- The two wires we need are the TAN car wire (+) and the RED car wire (-) (**Important: The RED wire on the CAR and LEDs are opposite**) (P). Next strip back each wire using wire strippers (Q). Wrap the RED LED wires (+) around the TAN car wire (+) then wrap connection in electrical tape and use zip ties to secure (R). Wrap the BLACK LED wires (-) around the RED car wire (-) then do the same and secure with electrical tape and zip ties (R).

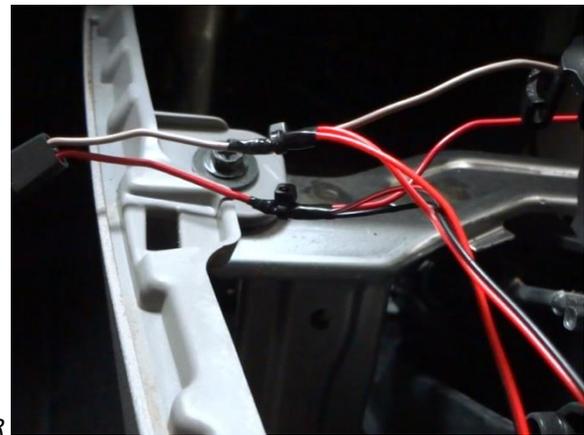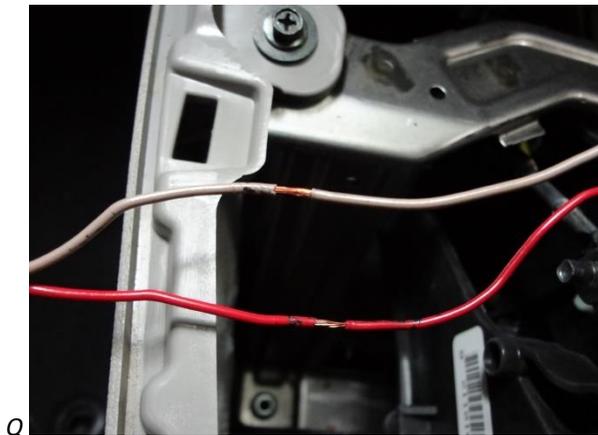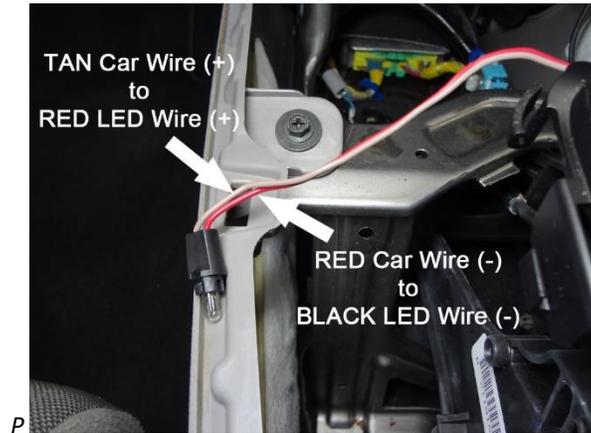

-Turn on the headlights of the car to test. Use the remaining zip ties to secure the LED wire slack. You're all done! Plug back in the bulb to the shifter and reassemble vehicle.

Please contact us directly if you have any installation questions or comments about the product. Thank you!

©AccentGlowLED™ 2016