

Illuminated Cup Holders

2013-2017 Hyundai Santa Fe (includes Sport)

Thanks for purchasing this Cup Holder Illumination Install Kit! If you have any questions or feedback please email us direct at info@AccentGlowLED.com

Color instructions and Installation video available at AccentGlowLED.com/instructions

Read these instructions completely before beginning installation



AccentGlowLED,LLC. does not assume responsibility and disclaims liability for damage, loss, or expense arising from improper use, operation, or installation of this product.

You may need the following tools:


- Plastic panel popper tool (Harbor Freight.com #67021)
- 3/16" Drill Bit (or larger)
- Electrical Tape
- Razor Blade
- Wire Strippers (product similar to the Irwin 2078300 is used)

Disassembly:

-Prior to beginning; engage the parking brake and make sure vehicle is powered off. Grip both hands on the shifter and forcibly pull upwards to remove shift handle and boot (A). We will be removing the panel highlighted in (B). Open the center armrest and using a plastic pry tool, wedge into left side of center console piece and carefully pop up then move the pry tool to the right and pop up the right side of the center console (C). With your hands, continue forward pulling upwards and popping up both sides of the console piece. The last piece to pop up will be the storage area (D) which also pops upwards attached to the rest of the console.

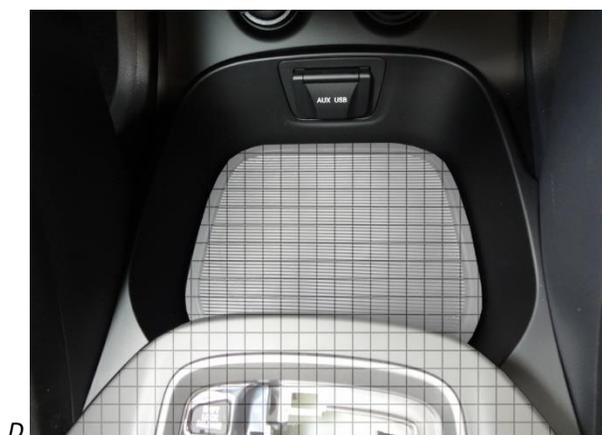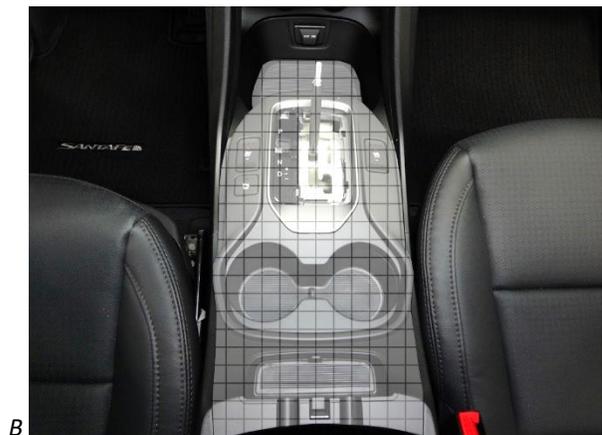

-Carefully lift up the console piece to reach the plugs underneath, depending on trim level you may have more or less plugs. In the center of each plug there is a button to depress, and then wiggle out each plug (E). Lift up and place entire center console on a work bench.

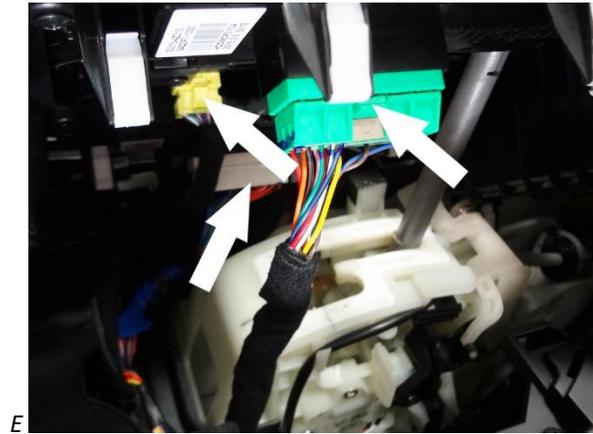


Installation:




-Thoroughly clean inside each cup holder with an alcohol pad or Windex (this step is important for quality of adherent). Drill a 3/16" hole from the top of the center console slightly off center in each cup holder (F). Carefully run your wires through the holes (G) and remove the red covering from the double-sided tape on the back of each cup holder disc (H). Center each disc and then press down firmly to secure each disc (do not remove disc once firmly pushed down) (I).




-Place center console in car on the driver seat. The wiring we need is in the yellow 12-pin plug that we previously unplugged. Cut or peel back the black cloth tape covering the wires. The wires we need are the RED w ORANGE STRIPE (+) pin 5 and BLACK (-) pin 1 (J). Begin by taking the RED (+) LED wires and twisting them together (K). Do the same with the BLACK (-) LED wires.

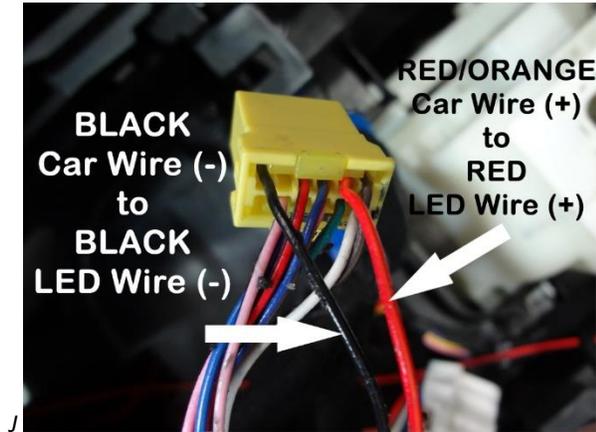


-Starting with the (+) side, take wire strippers and carefully strip back the RED w ORANGE STRIPE (+) car wire (L). Wrap the RED (+) LED wires around the RED/ORANGE (+) car wire (M). Wrap the connection in electrical tape and use a zip tie to secure (N). Repeat the process, attaching the BLACK (-) LED wires to the BLACK (-) car wire and ensure all connections are secured.

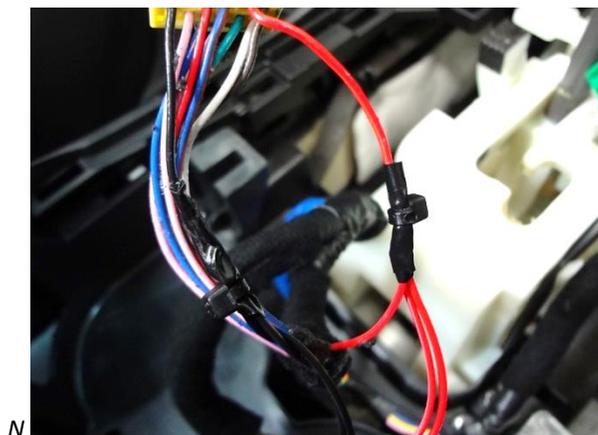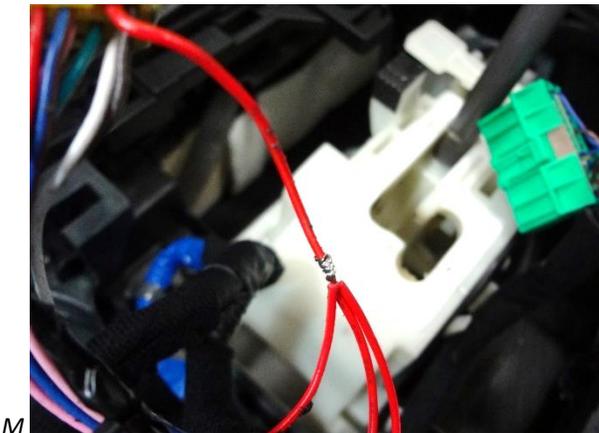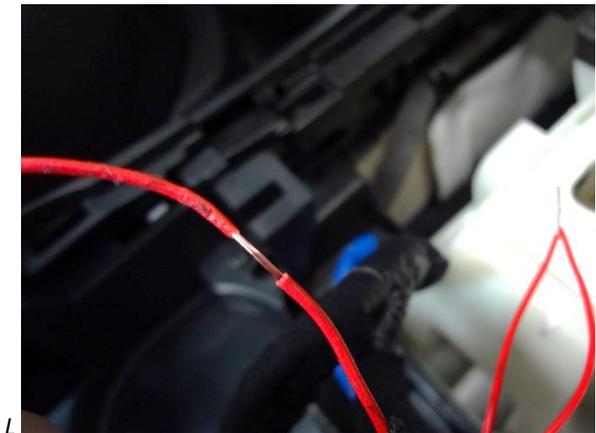

-Turn on the headlights of the car to test. Use the remaining zip ties to secure the LED wire slack (O). You're all done! Ensure you re-plug in all connectors. Tuck the wire slack to the left of the shifter, out of the way of the bottom of the cup holders and the shifter linkage (P).

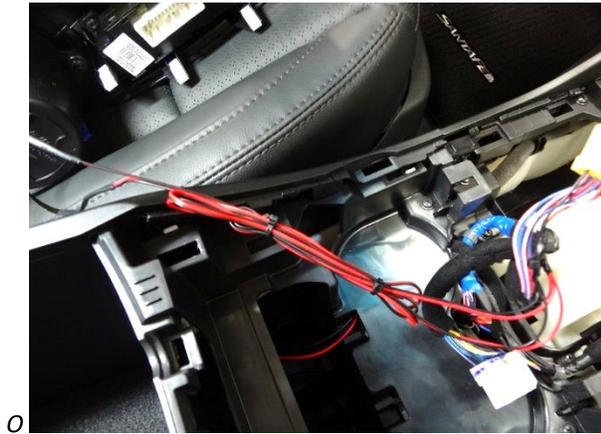

O

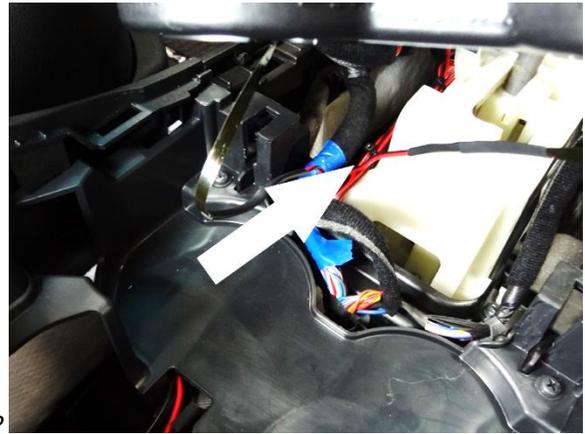

P

Contact us directly if you have any installation questions about the product. Please leave a review on our website!
Thank you!

©AccentGlowLED™ 2016