

///ACCENTGLOWLED.COM

Illuminated Cup Holders

2008-2012 Honda Accord (All Trims, includes Coupe and Crosstour)

Thanks for purchasing this Cup Holder Illumination Install Kit! If you have any questions or feedback please email us direct at info@AccentGlowLED.com

Color instructions and Installation video available at AccentGlowLED.com/instructions

Read these instructions completely before beginning installation


AccentGlowLED,LLC. does not assume responsibility and disclaims liability for damage, loss, or expense arising from improper use, operation, or installation of this product.

You may need the following tools:

- Plastic panel popper tool (Harbor Freight.com #67021)
- Small Flathead Screwdriver
- 3/16" Drill Bit (or larger)
- Electrical Tape
- Razor Blade
- Wire Strippers (product similar to the Irwin 2078300 is used)
- Soldering Iron or another wire attachment technique.

Disassembly:

-Prior to beginning; engage the parking brake, open the lower center dash pocket, and open the coin pocket door. Make sure vehicle is powered off. Begin by opening the center armrest pocket. We will be removing the panel shaded (A). Insert pry tool into section inside center armrest and lift up each left and right side by popping up (B). Continue popping up, going forward, via the sides until entire panel is loose (can be seen in instructional video). On the front left side underneath you will have to unplug the power socket plug by depressing the button in the center of the clip (C). You may have to also unplug heated seat plugs. Lift up and place entire center console on a work bench.

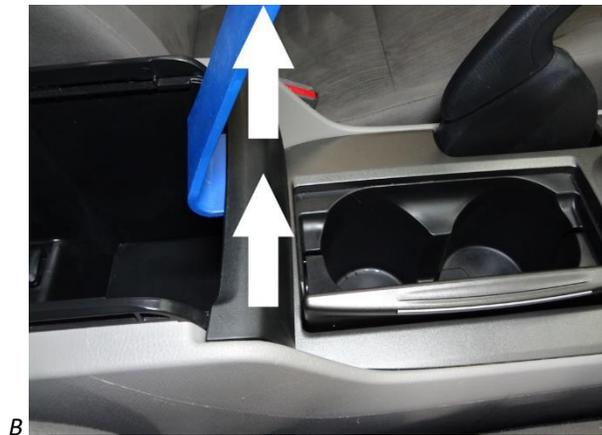

- Thoroughly clean inside each cup holder with an alcohol pad or Windex (this step is important for quality of adherent). Drill a 3/16" hole from the top of the center console slightly off center in each cup holder (D). Carefully run your wires through the holes starting at the top and remove the covering from the double-sided tape on the back of each cup holder disc (E). Center each disc and then press down firmly to secure each disc (do not remove disc once firmly pushed down). **The bigger of the two discs will go in the rear cup holder.**



D




E

-The wiring we need is in the white 6-pin plug to the right of the shifter (F). Unplug by depressing button in center of plug on right side (G). Take a razor blade and carefully cut away the black plastic from the wiring.




F

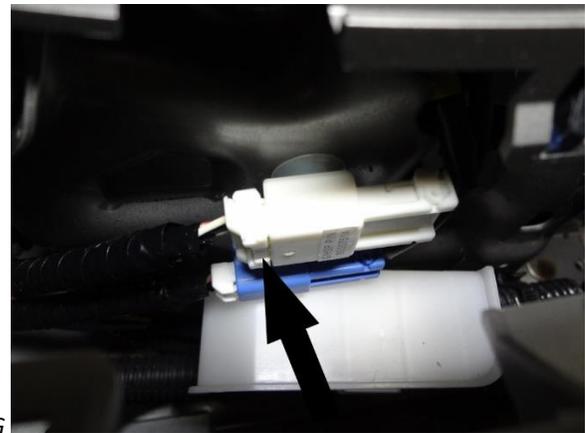


G

Installation:

-Place center console in car on drivers' seat. The two wires we need are the GRAY wire (pin 3 +) and the BLACK wire (pin 2 -) (H). Begin by taking the RED (+) LED wires and twisting them together (I).

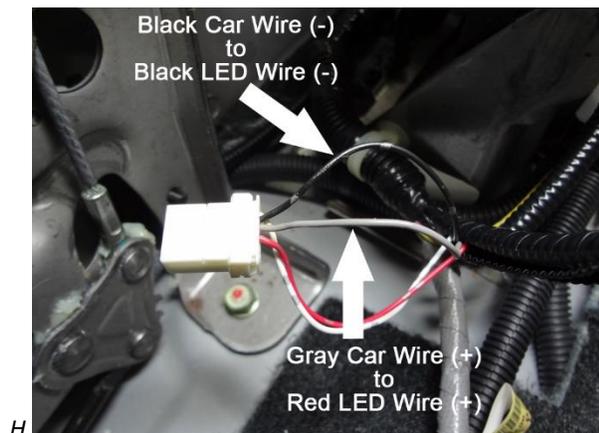


H

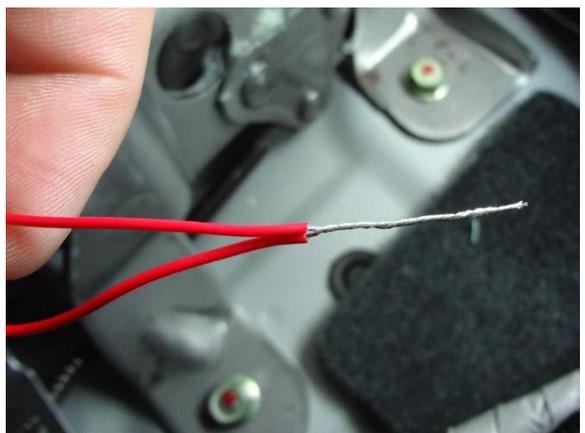

I

-Using wire strippers, carefully strip back the GRAY (+) car wire (J). Wrap the RED (+) LED wires around the GRAY (+) car wire (K). You can solder this connection, or just wrap tightly with electrical tape and secure with two zip ties (L).

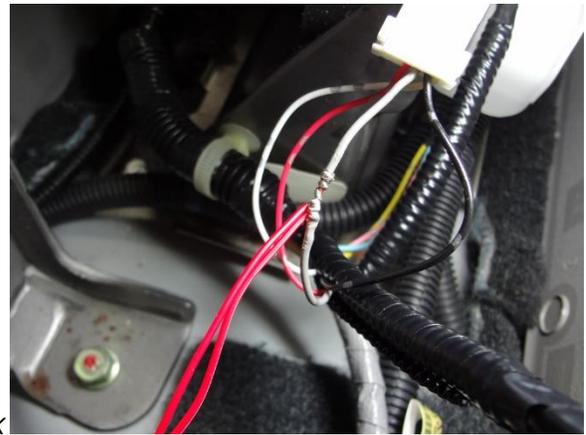

-Repeat the process, attaching the BLACK (-) LED wires to the BLACK (-) car wire (M). Use the remaining zip ties to secure the LED wire slack (N). Plug back in the white car plug and turn on the headlights to test. You're all done! The reinstall is the opposite of the uninstall.



Please contact us directly if you have any installation questions or comments about the product. Thank you!

©AccentGlowLED™ 2016