

Illuminated Cup Holders

2006-2011 Honda Civic

Thanks for purchasing this Cup Holder Illumination Install Kit! If you have any questions or feedback please email us direct at info@AccentGlowLED.com

Color instructions available at AccentGlowLED.com/instructions

Read these instructions completely before beginning installation

AccentGlowLED,LLC. does not assume responsibility and disclaims liability for damage, loss, or expense arising from improper use, operation, or installation of this product.

You may need the following tools:



- Plastic panel popper tool (Harbor Freight.com #67021)
- Small Flathead Screwdriver
- Phillips Head Screwdriver
- 3/16" Drill Bit (or larger)
- Electrical Tape
- Razor Blade
- Wire Strippers (product similar to the Irwin 2078300 is used)
- Soldering Iron or another wire attachment technique

Disassembly:



-Prior to beginning; engage the parking brake and make sure vehicle is powered off. First we will be popping off the shifter trim highlighted in (A). Wedge plastic pry tool in between panels and pop all 4 corners upwards to release clips (B). Next we will be removing the panel highlighted in (C). Using a pry tool or your hands, begin by popping up rear of panel, then the front, the maneuver backwards over shifter to remove (D).



-Open the center armrest and remove the two phillips head screws (E). In front of the shifter, remove the outer two phillips head screws (F).

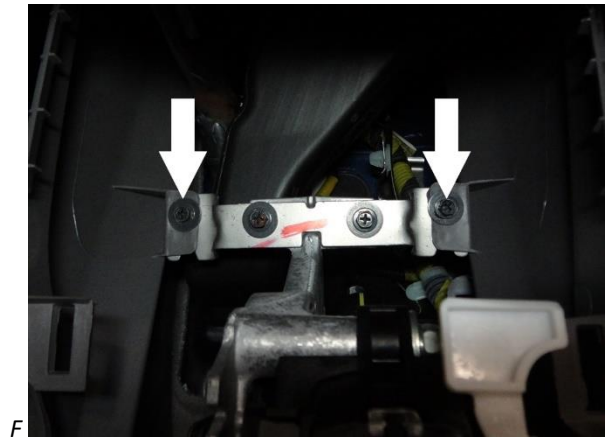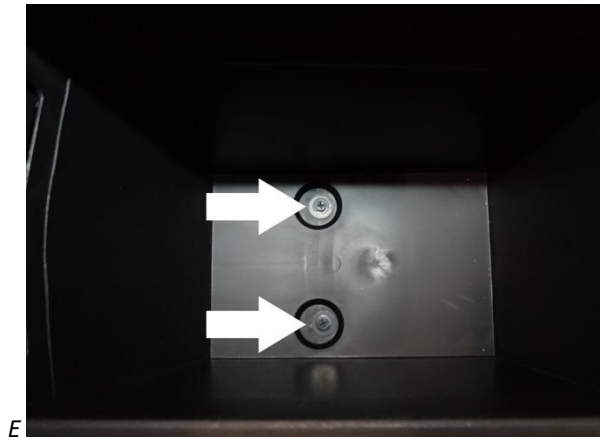

-On the driver side lower front of the center console, remove the clip by using a small flathead screwdriver and popping out the inner portion of the clip (where the notch is) and then pull the remainder of the clip out (G). On the lower passenger side dash, remove the black under dash cover by pulling towards the back of the vehicle with your hands (H). There is a clip on the front part of the lower center console to remove the same way as the driver side (I). Now the entire center console should be free, slide the entire assembly slightly backwards and carefully lift out of vehicle to your work bench (J).

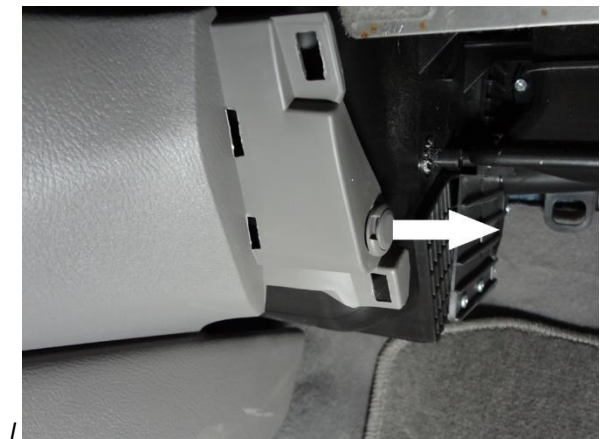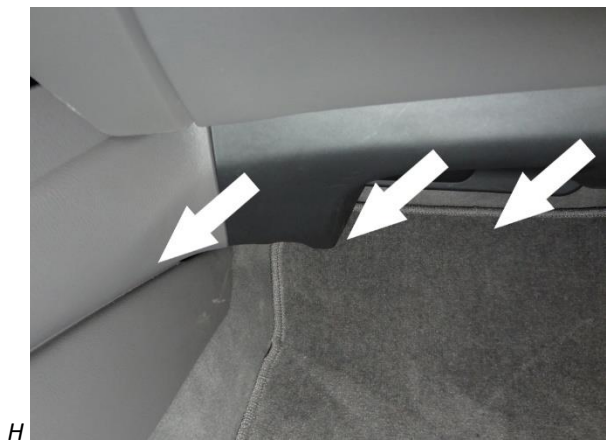


- Thoroughly clean inside each cup holder with an alcohol pad or Windex (this step is important for quality of adherent). Drill a 3/16" hole from the top of the center console slightly off center in each cup holder (K). Carefully run your wires through the holes starting at the top and remove the red covering from the double-sided tape on the back of each cup holder disc (L). Center each disc and then press down firmly to secure each disc (do not remove disc once firmly pushed down). On the underside of the console you can use a zip tie to carefully secure the wiring out of the way (be gentle with the black part of the LED wires) (M).



K



L

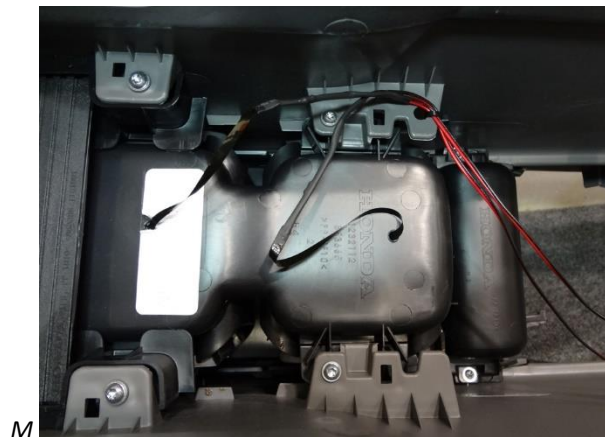


M

Installation:

-Place center console in car in the center as far back as you can (for room to work). The wiring we need is in the white 4-pin plug on the front of the shifter area (N). Unplug by depressing the button in the center of the plug and remove. Use a razor blade to carefully remove the tape on the wiring. The two wires we need are the GREY car wire (+) (pin 2) and the BLACK car wire (-) (pin 4) (O).







N

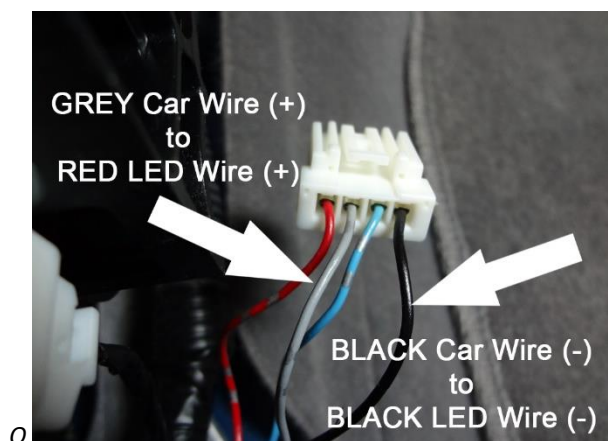

O

-Begin by taking the BLACK (-) LED wires and twisting them together. Do the same with the RED (+) LED wires. Strip back the BLACK car wire (-) (P). Wrap the BLACK LED wires (-) around the BLACK car wire (-) (Q). Wrap the connection in electrical tape and use zip ties to secure (R). Wrap the RED LED wires (+) around the GREY car wire (+) then do the same and secure with electrical tape and zip ties (S).

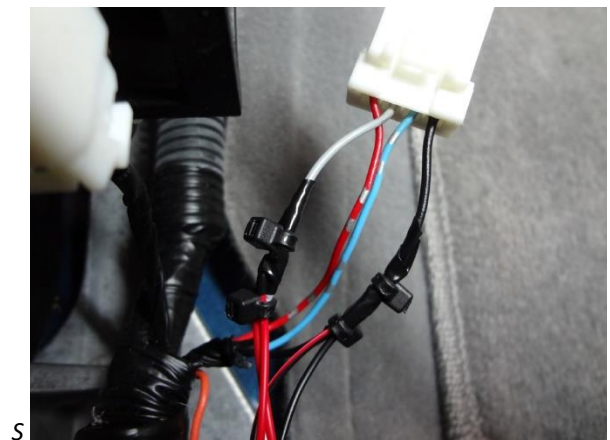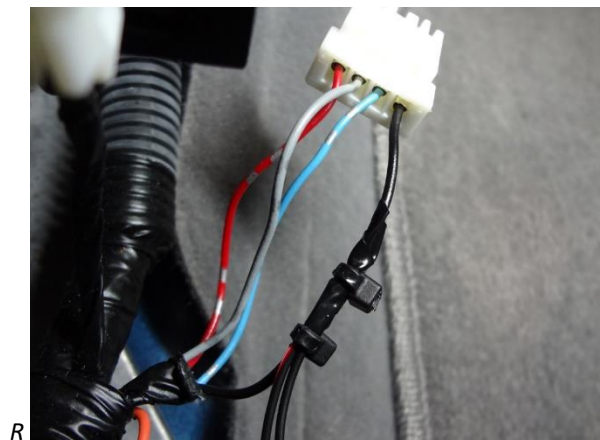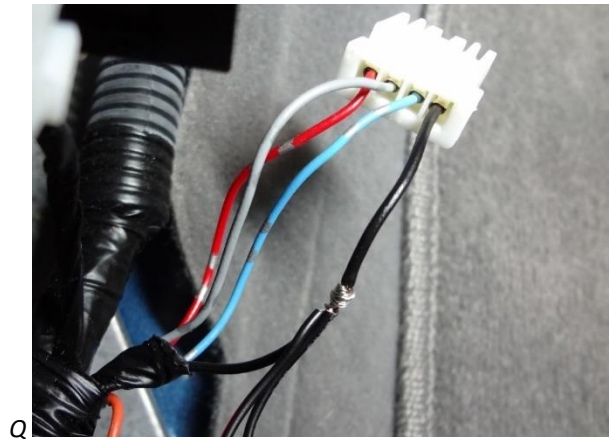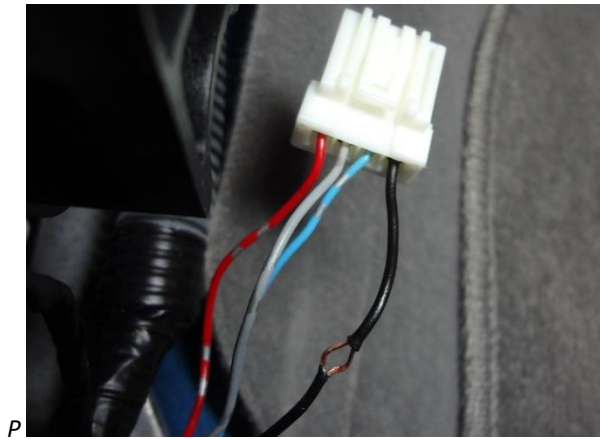

-Turn on the headlights of the car to test. Use the remaining zip ties to secure the LED wire slack (T). You're all done! Plug back in all connectors and reassemble vehicle.



Please contact us directly if you have any installation questions or comments about the product. Thank you!

©AccentGlowLED™ 2016